


Under-unit light 24 V GERA Light system 6

www.gera-leuchten.de

Technical information 06.2015

Light connection	left, connecting cable 1.5 m with mini plug
Light length	minimum 300 mm maximum 5000 mm
Acrylic cover	curtailed delivery of acrylic cover due to heat expansion
Materials	anodised aluminium coloured anodised stainless steel coloured Sensor switch on/off and dimming (optional)

Nominal voltage	24 V
Light colour	3000 K (warm white) 4000 K (neutral white)
Brightness	1200 lm/m
Power	19 W/m
Energy efficiency class	A+
Protection class	◊
Protection type	IP 20

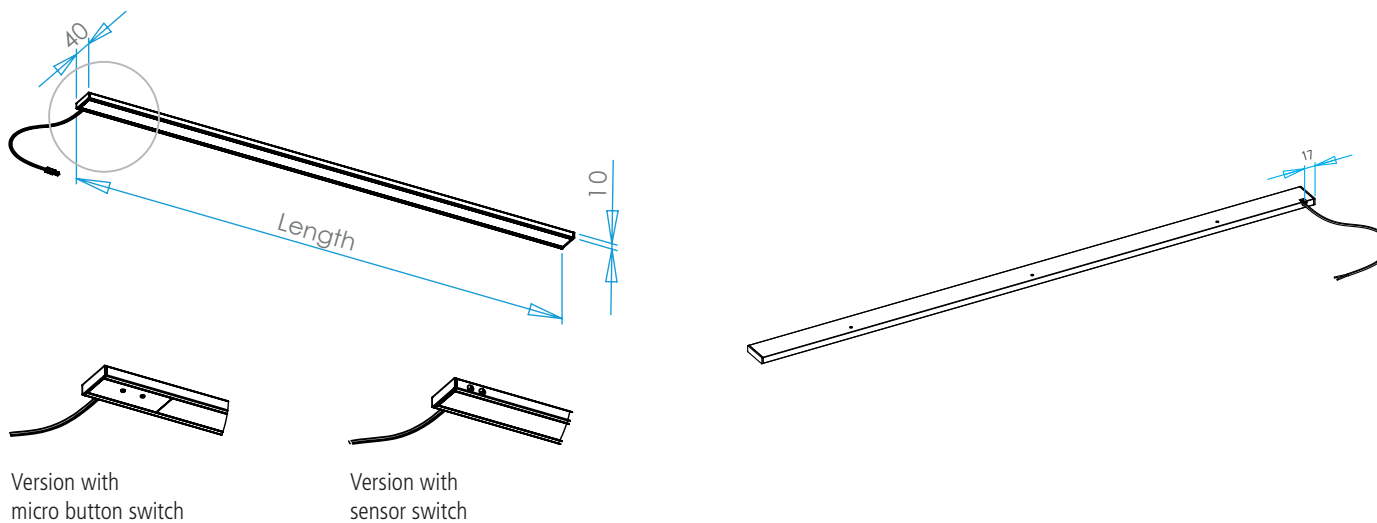

Dimensions in mm