



GERA Glass base support

www.gera-leuchten.de

Technical information 06.2015

Light connection	right, connecting cable 2m, Schuko plug enclosed alternatively on the right, directly onto the connecting terminal
Light length	minimum 400 mm maximum 1200 mm
Load-bearing capacity	4 kg/m
Materials	anodised aluminium coloured anodised stainless steel coloured Single-pane safety glass satin-finished Switch on the right

Nominal voltage	230 V, 50 – 60 Hz
Illuminant	LED
Light colour	4000 K (warm white)
Brightness	300 lm/m
Power	5 W/m
Energy efficiency class	A+
Protection class	◊ I
Protection type	IP 20

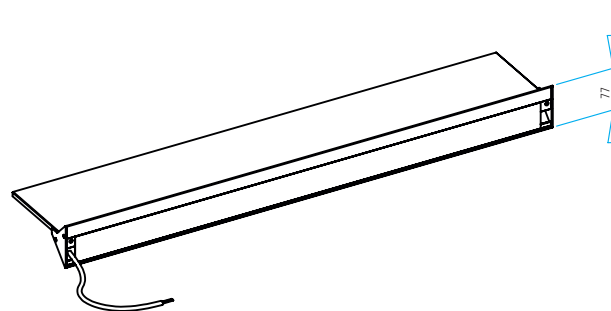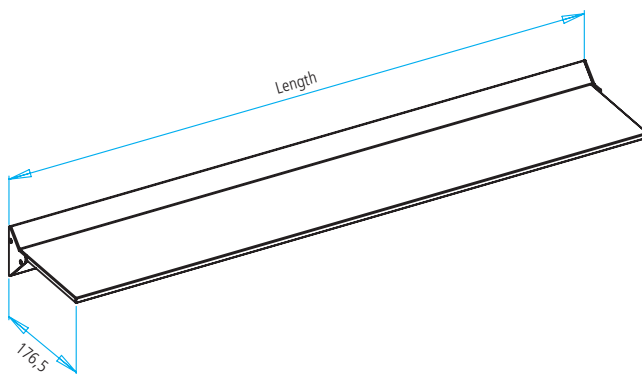

Dimensions in mm